

THERMOSTATIC CONTROL UNITS

THERMOSTATIC MIXING VALVE SERIES VTG140

The ESBE thermostatic mixing valves series VTG140 offer high flow capacity and high functionality in heating applications.



VTG141

OPERATION

The series VTG140 is the number one choice for underfloor heating. The valves provide a scald safe* function, which is important in order to protect e.g. under floor heating pipes and also the floor itself from to uncontrolled rise of temperature.

FUNCTION

The valves have 4 connections which gives flexibility during the installation and is delivered with a 20-55°C temperature range. The wax element reacts on the water temperature and moves the cone to mix cold and hot water achieving desired, set mixed temperature.






MEDIA

These valves can handle the following types of media:

- Water
- Heating water
- Water with antifreeze additive (glycol ≤ 50% mixture)

*) Scald safe means that in the case of a cold water failure, the hot water supply shuts off automatically.

VALVES ARE DESIGNED FOR

| Series | Temperature range | Application |
|--------|-------------------|---|
| VTG140 | 20 – 55°C |  Potable water, in line |
| VTG140 | |  Potable water, point of use |
| VTG140 | |  Solar heating |
| VTG140 | ● |  Floor heating |
| VTG140 | ○ |  Radiator heating |

● recommended ○ secondary alternative

TECHNICAL DATA

Pressure class: _____ PN 10
 Working pressure: _____ 1,0 MPa (10 bar)
 Differential pressure, mixing: _____ max. 0,1 MPa (1 bar)
 Max. media temperature: _____ continuously 95°C
 _____ temporarily 100°C
 Min. media temperature: _____ 0°C
 Temperature stability: _____ ±3°C*
 Connection: _____ Internal thread (Rp), EN 10226-1
 _____ External thread (G), ISO 228/1

Material

Valve housing and other metal parts with fluid contact:
 _____ Dezincification resistant brass, DZR
 Surface treatment: _____ Nickel-plated


* Valid at unchanged cold/return water pressure, minimum flow rate 9 l/min. Minimum temperature difference between cold water inlet and mixed water outlet 3°C and recommended maximum temperature difference between return water and mixed water outlet: 10°C.

PED 2014/68/EU, article 4.3

Pressure Equipment in conformity with PED 2014/68/EU, article 4.3 (sound engineering practice). According to the directive the equipment shall not carry any CE-mark.

THERMOSTATIC MIXING VALVE

SERIES VTG140

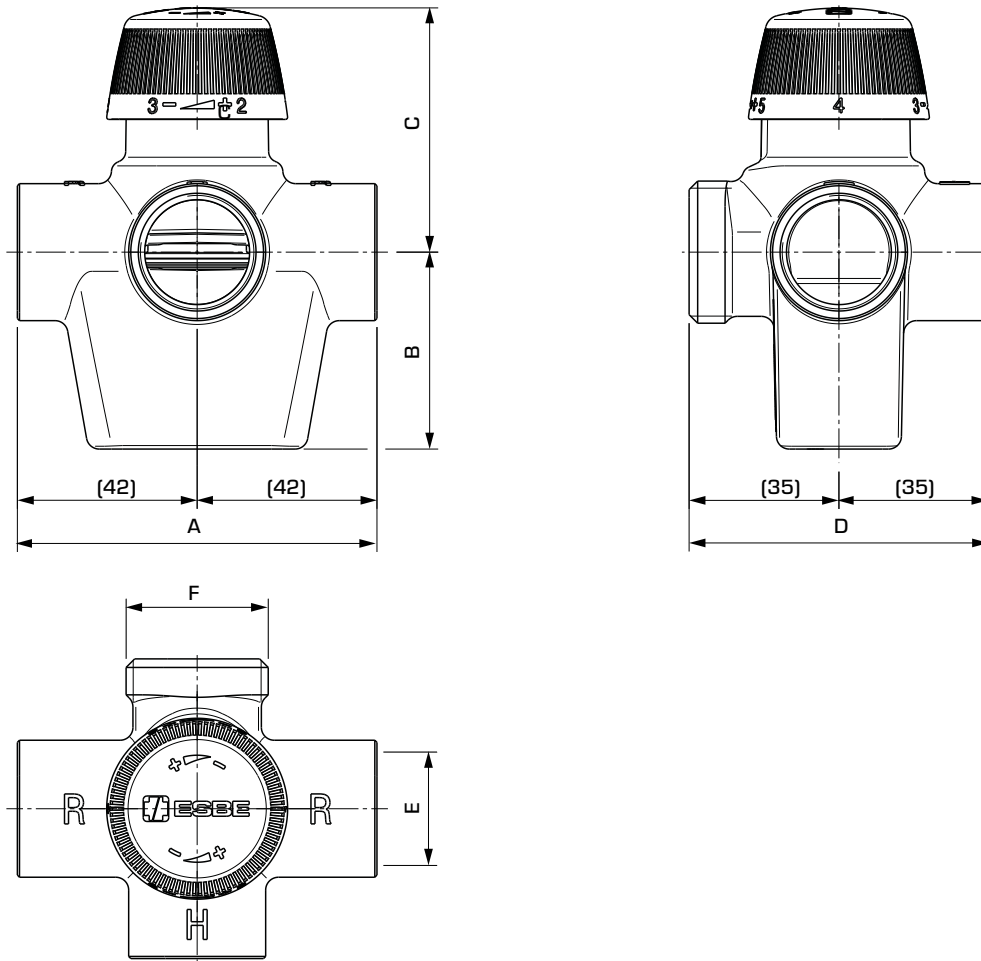

SERIES VTG141, INTERNAL AND EXTERNAL THREAD


| Art. No. | Reference | Temp. range | Kvs* | Connection | | Dimension | | | | Weight [kg] | Note |
|----------|-----------|-------------|------|------------|------|-----------|----|--------|----|-------------|------|
| | | | | E | F | A | B | C | D | | |
| 31810100 | VTG141 | 20 - 55°C | 3,4 | Rp 3/4" | G 1" | 84 | 46 | max 60 | 70 | 0,75 | |

* Kvs-value in m³/h at a pressure drop of 1 bar

THERMOSTATIC MIXING VALVE

SERIES VTG140

CAPACITY DIAGRAM

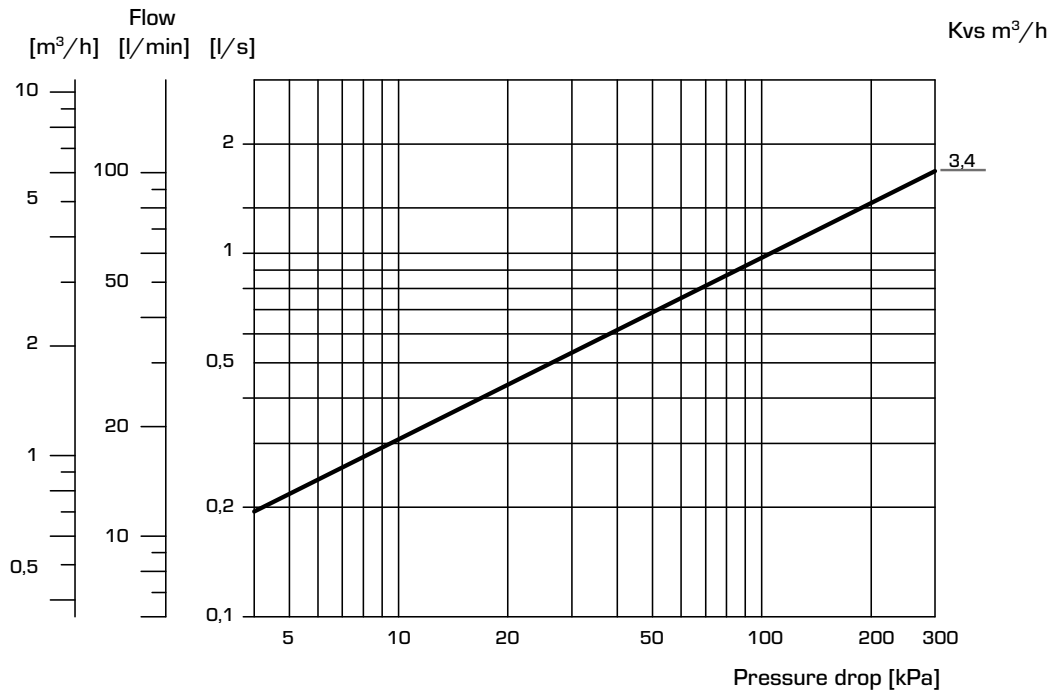

INSTALLATION EXAMPLES

See the catalogue section “How to choose the correct installation/ position” for further information and connection examples.

